


# Replacing Toggle Loops

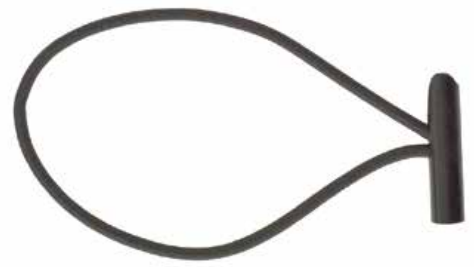


## A HANDY GUIDE

Only certain trampoline models have frame pads which fix to the frame using toggle loops. Check the underside of your frame pads to find out.

### STEP

1

If you are fitting your frame pads for the first time, unfold them so the underside is facing up and you can see the eyelets.

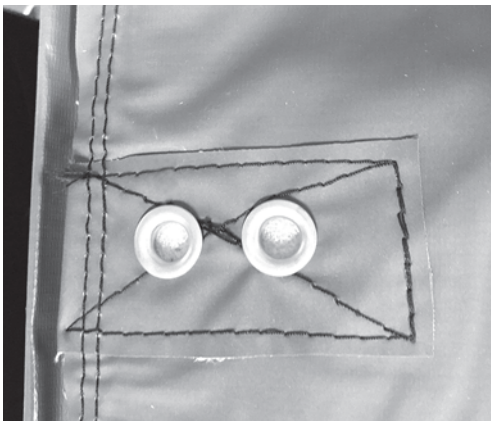


The underside of the frame pads

### STEP

2

Take a toggle loop. Thread the elasticated loop through both eyelets. Once you have threaded the loops on one side, flip the pads over and thread the other side until all eyelets and threaded.

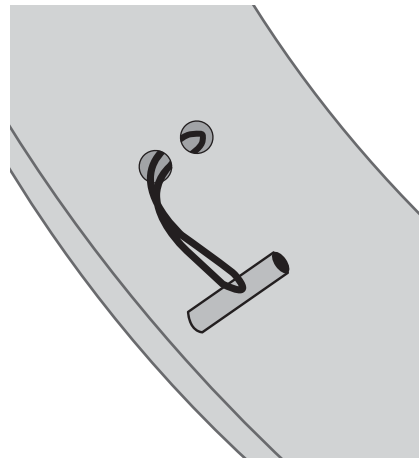


**Tip:** it might be useful to have a screwdriver (or similar) available to help feed the loop through the eyelet.

### STEP

3


Turn the pads over and place them in position over the frame and springs.

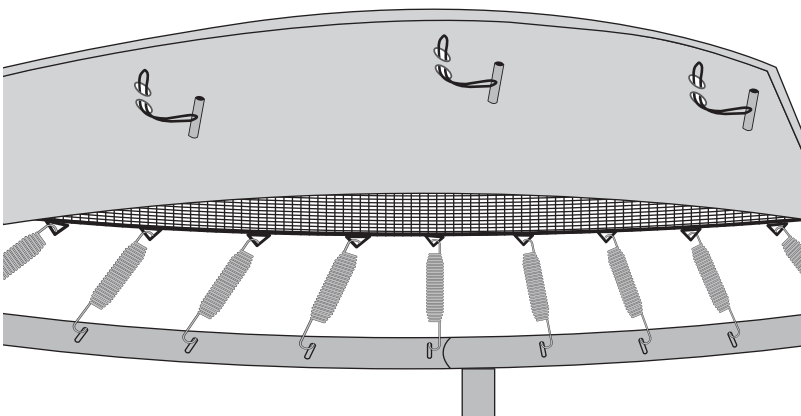

### STEP

4

The elastic loop simply wraps around the frame and the plastic toggle through the loop.

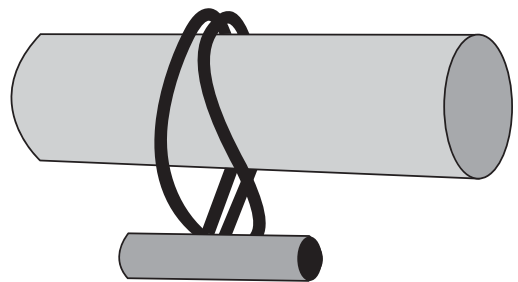

When all loops are attached, and the pads are secured to the frame, pull the skirt of the frame pad down so the top rail is hidden.

Adult installation required

Read User Guide before assembling

Please keep this guide for further reference



**SUPER TRAMP**  
Part of the Family - Est 1983